

SERIES 6000

Singlehung



FEATURES AND BENEFITS

- AAMA-approved, multi-chambered profiles, fusion welded for strength and weather-ability
- Interior glazed frame (for serviceability) with up to 7/8" insulating glass
- Distinctive 2-3/4" brick-mold face; 3-3/16" overall frame depth
- 9/16" x 1-1/4" balance shoe pocket
- Dedicated, sloped sill
- Integral 5/8" x 3/4" J-Channel and 1-1/4" setback nailing fin
- Interior accessory groves
- Wide fixed meeting rail with integral screw bosses and interlock
- Drywall pass-thru units are possible
- Available in white, beige or clay
- AAMA-approved sash profiles with double-wall glazing legs
- Exterior-glazing provides positive water seal and optional impact resistance
- Integral lift handle and interlock on meeting rail
- Large reinforcement cavities
- Sash tilts in for ease of cleaning and is removable for service
- Glazing options up to 7/8" I.G.
- Glass stops snap in perpendicular to the glazing for ease of insertion
- Designed to accept a wide range of locks and keepers
- Many balance types and sizes are optional
- Sill weeps are not required
- Accepts most standard and high-performance tilt latches
- Can use a variety of screen types and screen hardware
- AAMA DP45 water possible with the dedicated sill
- U-value $U_{0.25}$ (R4) possible with proper glazing
- May pass wind-borne debris (impact) testing with the proper glazing and hardware
- Forced Entry Resistance (FER) rating is possible using the required lock hdwe

359 PRINTWOOD DRIVE
DICKSON, TN 37065

PHONE: (615) 325-0001
FAX: (615) 326-0002


INFO@BAVARIANPOLYMERS.COM
WWW.BAVARIANPOLYMERS.COM

BAVARIAN POLYMERS



SERIES 6000

Singlehung

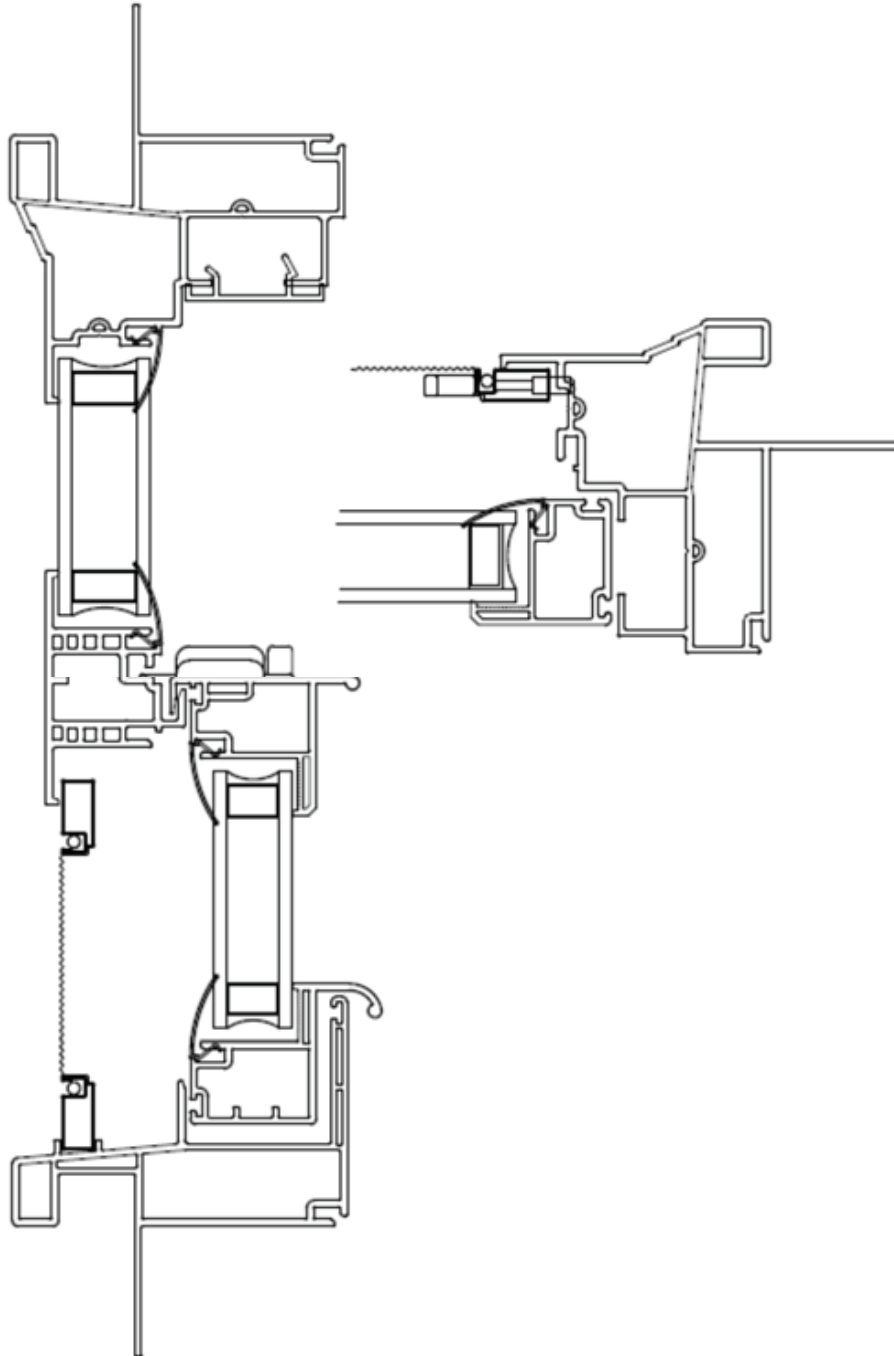

359 PRINTWOOD DRIVE
DICKSON, TN 37065

PHONE: (615) 325-0001
FAX: (615) 326-0002

INFO@BAVARIANPOLYMERS.COM
WWW.BAVARIANPOLYMERS.COM

BAVARIAN POLYMERS

