

SERIES 9500

Doublehung



FEATURES AND BENEFITS

- AAMA-approved profiles, multi-chambered for increased rigidity and performance
- Fusion-welded corners for strength, weather-ability and longevity
- Dual weatherstripping at all frame and sash locations
- Optional full or half screens
- Beveled 3-1/4" frame (O.A. 4-5/16") with interior and exterior accessory grooves
- Optional dedicated head
- Sloped/stepped sill with integral sash bottom rail interlock
- Matching picture window frame
- Groove for slide-on nailing fin – setback dimensions are optional
- Double-wall glazing legs and equal width & height glass
- Standard single or dual cam lock with keeper(s)
- Optional recessed (flush) lock or Truth's "Harmony" combination lock & tilt latch
- Insulating glass up to 1-1/4" overall thickness
- Integral lift handles on all sash rails
- Integral interlocks on meeting rails
- Tilt-in operation for ease of cleaning; sash are removable for service
- Designed for 3/4" heavy-duty constant-force coil spring balances
- Numerous I.G. options are possible, including triple-pane, Low E coatings, internal grids
- Available mullions
- Designed for AAMA DP50-65 structural on selected sizes with proper reinforcement
- Designed for AAMA DP65 water rating
- Forced Entry Resistance (FER) rating possible with proper hardware
- Windborne debris (impact) resistance rating possible with proper glazing and hardware

359 PRINTWOOD DRIVE
DICKSON, TN 37065

PHONE: (615) 325-0001
FAX: (615) 326-0002


INFO@BAVARIANPOLYMERS.COM
WWW.BAVARIANPOLYMERS.COM

BAVARIAN POLYMERS



SERIES 9500

Doublehung

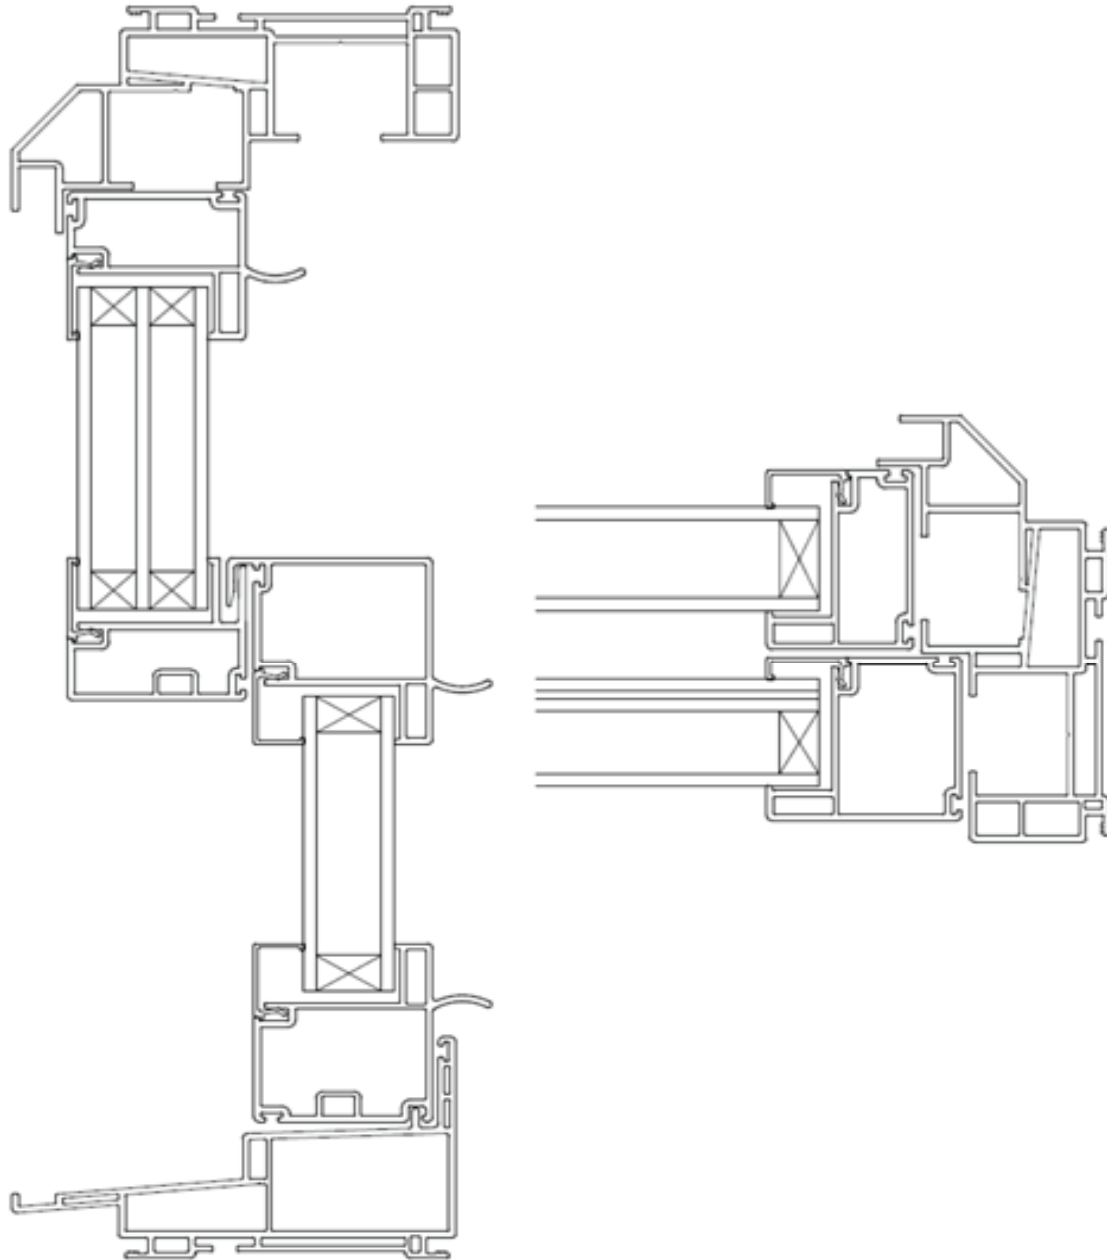

359 PRINTWOOD DRIVE
DICKSON, TN 37065

PHONE: (615) 325-0001
FAX: (615) 326-0002

INFO@BAVARIANPOLYMERS.COM
WWW.BAVARIANPOLYMERS.COM

BAVARIAN POLYMERS

