

SERIES 7000

Singlehung



FEATURES AND BENEFITS

- AAMA-approved, multi-chambered profiles, fusion welded for strength and weather-ability
- Interior glazed frame (for serviceability) with up to 7/8" insulating glass
- Distinctive brick-mold face; 3-1/8" overall depth
- 9/16" x 1-1/4" balance shoe pocket
- Available options include uni-frame or dedicated, sloped/pocket sill
- Integral J-Channel and nailing fin
- Interior and exterior accessory grooves
- Wide fixed meeting rail with integral screw bosses and interlock
- Available in white, beige or clay
- AAMA-approved sash profiles with double-wall glazing legs
- Exterior-glazing provides positive water seal and optional impact resistance
- Integral lift handle and interlock on meeting rail
- Large reinforcement cavities
- Sash tilts in for ease of cleaning and is removable for service
- Glazing options up to 7/8" I.G.
- Glass stops snap in perpendicular to the glazing for ease of insertion
- Designed to accept a wide range of locks and keepers
- Many balance types and sizes are optional
- Will function with or without sill weep hole covers
- Accepts most standard and high-performance tilt latches
- Can use a variety of screen types and screen hardware
- AAMA DP40 structural possible on some sizes with the proper reinforcement
- AAMA DP50 water possible with the dedicated sill
- U-value $U_0.25 (R_4)$ possible with proper glazing
- May pass wind-borne debris (impact) testing with the proper glazing and hardware
- Forced Entry Resistance (FER) rating is possible using the required lock hardware

359 PRINTWOOD DRIVE
DICKSON, TN 37065

PHONE: (615) 325-0001
FAX: (615) 326-0002



INFO@BAVARIANPOLYMERS.COM
WWW.BAVARIANPOLYMERS.COM

BAVARIAN POLYMERS



SERIES 7000

Singlehung

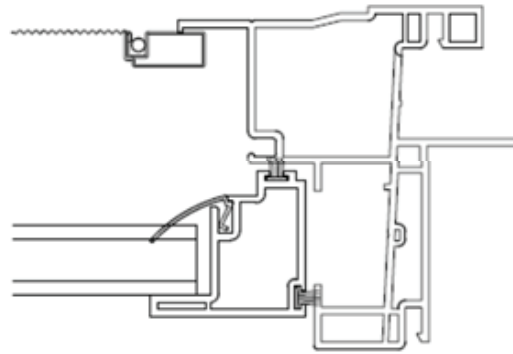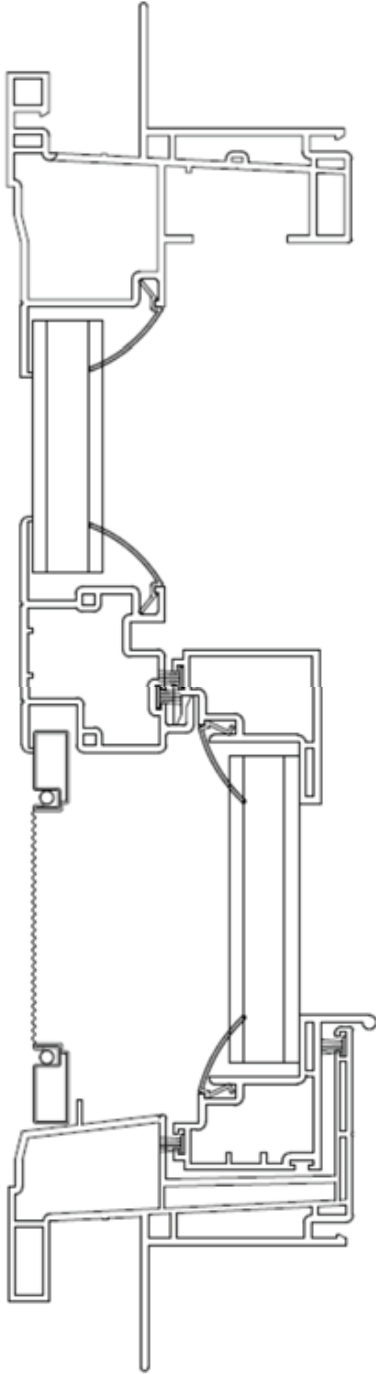

359 PRINTWOOD DRIVE
DICKSON, TN 37065

PHONE: (615) 325-0001
FAX: (615) 326-0002

INFO@BAVARIANPOLYMERS.COM
WWW.BAVARIANPOLYMERS.COM

BAVARIAN POLYMERS

